

# 200µm Fiber, NA 0.22, High Power SMA/SMA

## Features

- Free standing fiber tip
- High centricity




## Device Specification

Parameter	Units	
Connector Type		SMA 905 both sides, with Free Standing Fiber Tip.
Ferule Diameter	mm	3.167 – 3.172
Outer Diameter (Largest Diameter at Connector)	mm	9.5
Cable Diameter	mm	7.6
Fiber Length <sup>1</sup>	m	2 or 5 ± 0.1
Numerical Aperture	NA	0.22 ± 0.02
Core Diameter	µm	200 ± 4
Cladding Diameter	µm	280 ± 5
Centricity	µm	<6
Long Term Bending Radius (Coil Radius)	mm	min. 44
Short Term Bending Radius	mm	min. 22

<sup>1</sup>Others on request.

## Dimensions

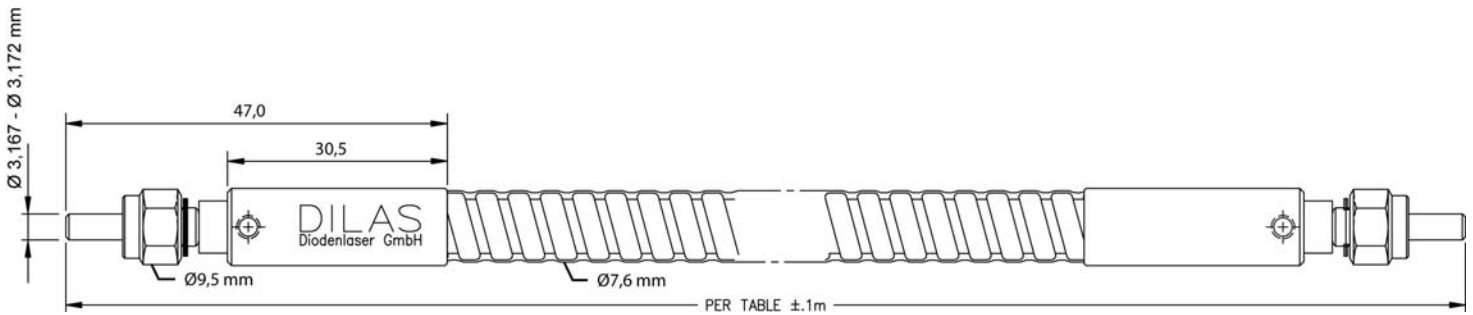

©2009 DILAS. All rights reserved. DILAS reserves the right to change products specifications without notice. For handling precautions, please reference the general handling instruction manual.

For complete details, please contact your local DILAS sales representative or visit our website at [www.DILAS.com](http://www.DILAS.com).

**Europe**  
**DILAS Diodelaser GmbH**  
 Galileo-Galilei-Straße 10  
 55129 Mainz  
 Germany  
 Phone: +49 (6131) 9226 0  
 Fax: +49 (6131) 9226 257  
 Email: [sales@DILAS.de](mailto:sales@DILAS.de)

**North America**  
**DILAS Diode Laser, Inc.**  
 9070 South Rita Road  
 Suite 1500  
 Tucson, AZ 85747  
 Phone: +1 (520) 232-3484  
 Fax: +1 (520) 232-3499  
 Email: [sales@DILAS-INC.com](mailto:sales@DILAS-INC.com)

**China & Taiwan**  
**DILAS Diodelaser GmbH**  
 China Sales Office  
 Room 206, Sunplus Technology, Bldg. 2  
 No. 1077 Zu Chongzhi Road  
 Hi-Tech Park, Shanghai 201203,  
 P.R. China  
 Phone: +86 (0) 21-6855-2216  
 Fax: +86 (0) 21-5027-3793  
 Email: [sales@dilas-china.com.cn](mailto:sales@dilas-china.com.cn)